

# **RADIATIVE VIEW FACTORS**

View factor definition	2
View factor algebra	
View factors with two-dimensional objects	4
Very-long triangular enclosure	5
The crossed string method	7
View factor with an infinitesimal surface: the unit-sphere and the hemicube methods	
With spheres	9
Patch to a sphere	9
Frontal	9
Level	9
Tilted	9
Patch to a spherical cap	
Sphere to concentric external cylinder	
Disc to frontal sphere	
Cylinder to large sphere	
Cylinder to its hemispherical closing cap	
Sphere to sphere	
Small to very large	
Concentric spheres	
Sphere to concentric hemisphere	
Hemispheres	
Concentric hemispheres	
Small hemisphere frontal to large sphere	
Hemisphere to planar surfaces	
Spherical cap to base disc	
With cylinders	
Cylinder to large sphere	
Cylinder to its hemispherical closing cap	
Very-long cylinders	
Concentric cylinders	
Concentric cylinder to hemi-cylinder	
Concentric frontal hemi-cylinders	
Concentric opposing hemi-cylinders	
Hemi-cylinder to central strip	
Hemi-cylinder to infinite plane	17
Equal external cylinders	
Equal external hemi-cylinders	
Planar strip to cylinder	
Wire to parallel cylinder	19
Finite cylinders	
Base to lateral surface	
Disc to coaxial cylinder	

Equal finite concentric cylinders	20
Outer surface of cylinder to annular disc joining the base	21
Cylindrical rod to coaxial disc at one end	21
With plates and discs	22
Parallel configurations	22
Patch to disc	22
Patch to annulus	22
Patch to rectangular plate	22
Equal square plates	22
Equal rectangular plates	23
Rectangle to rectangle	23
Unequal coaxial square plates	23
Box inside concentric box	24
Equal discs	25
Unequal discs	25
Patch to infinite plate	25
Perpendicular configurations	26
Patch to rectangular plate	26
Square plate to rectangular plate	26
Rectangular plate to equal rectangular plate	26
Rectangular plate to unequal rectangular plate	27
Rectangle to rectangle	27
Cylindrical rod to coaxial disc at one end	27
Strip to strip configurations	27
Equal parallel strips	27
Equal adjacent strips	28
Unequal parallel strips	28
Unequal normal adjacent strips	28
Sides of a triangular prism	28
Numerical computation	29
References	30

# VIEW FACTOR DEFINITION

The view factor  $F_{12}$  is the fraction of energy exiting an isothermal, opaque, and diffuse surface 1 (by emission or reflection), that directly impinges on surface 2 (to be absorbed, reflected, or transmitted). View factors depend only on geometry. Some view factors having an analytical expression are compiled below. We will use the subindices in  $F_{12}$  without a separator when only a few single view-factors are concerned, although more explicit versions, like  $F_{1,2}$ , or even better,  $F_{1\rightarrow 2}$ , could be used.

From the above definition of view factors, we get the explicit geometrical dependence as follows. Consider two infinitesimal surface patches,  $dA_1$  and  $dA_2$  (Fig. 1), in arbitrary position and orientation, defined by their separation distance  $r_{12}$ , and their respective tilting relative to the line of centres,  $\beta_1$  and  $\beta_2$ , with  $0 \le \beta_1 \le \pi/2$  and  $0 \le \beta_2 \le \pi/2$  (i.e. seeing each other). The expression for  $dF_{12}$  (we used the differential symbol 'd' to match infinitesimal orders of magnitude, since the fraction of the radiation from surface 1 that reaches surface 2 is proportional to  $dA_2$ ), in terms of these geometrical parameters is as follows. The radiation power intercepted by surface  $dA_2$  coming directly from a diffuse surface  $dA_1$  is the product of its radiance  $L_1=M_1/\pi$ , times its perpendicular area  $dA_{1\perp}$ , times the solid angle subtended by  $dA_2$ ,  $d\Omega_{12}$ ; i.e.  $d^2 \Phi_{12}=L_1 dA_{1\perp} d\Omega_{12}=L_1 (dA_1 \cos(\beta_1)) dA_2 \cos(\beta_2)/r_{12}^2$ . Thence:

$$dF_{12} = \frac{d^2 \Phi_{12}}{M_1 dA_1} = \frac{L_1 d\Omega_2 dA_1 \cos(\beta_1)}{M_1 dA_1} = \frac{\cos(\beta_1)}{\pi} d\Omega_{12} = \frac{\cos(\beta_1)}{\pi} \frac{dA_2 \cos(\beta_2)}{r_{12}^2} = \frac{\cos(\beta_1) \cos(\beta_2)}{\pi r_{12}^2} dA_2 \quad (1)$$




Fig. 1. Geometry for view-factor definition.

When finite surfaces are involved, computing view factors is just a problem of mathematical integration (not a trivial one, except in simple cases). Notice that the view factor from a patch  $dA_1$  to a finite surface  $A_2$ , is just the sum of elementary terms, whereas for a finite source,  $A_1$ , the total view factor, being a fraction, is the average of the elementary terms, i.e. the view factor between finite surfaces  $A_1$  and  $A_2$  is:

$$F_{12} = \frac{1}{A_1} \int_{A_1} \left( \int_{A_2} \frac{\cos \beta_1 \cos \beta_2}{\pi r_{12}^2} \, \mathrm{d}A_2 \right) \mathrm{d}A_1 \tag{2}$$

Recall that the emitting surface (exiting, in general) must be isothermal, opaque, and Lambertian (a perfect diffuser for emission and reflection), and, to apply view-factor algebra, all surfaces must be isothermal, opaque, and Lambertian. Finally notice that  $F_{12}$  is proportional to  $A_2$  but not to  $A_1$ .

### View factor algebra

When considering all the surfaces under sight from a given one (let the enclosure have N different surfaces, all opaque, isothermal, and diffuse), several general relations can be established among the  $N^2$  possible view factors  $F_{ij}$ , what is known as view factor algebra:

- Bounding. View factors are bounded to  $0 \le F_{ij} \le 1$  by definition (the view factor  $F_{ij}$  is the fraction of energy exiting surface *i*, that impinges on surface *j*).
- Closeness. Summing up all view factors from a given surface in an enclosure, including the possible self-view factor for concave surfaces,  $\sum_{j} F_{ij} = 1$ , because the same amount of radiation emitted by a surface must be absorbed.
- Reciprocity. Noticing from the above equation that  $dA_i dF_{ij} = dA_j dF_{ji} = (\cos\beta_i \cos\beta_j / (\pi r_{ij}^2)) dA_i dA_j$ , it is deduced that  $A_i F_{ij} = A_j F_{ji}$ .

- Distribution. When two target surfaces (*j* and *k*) are considered at once,  $F_{i,j+k} = F_{ij} + F_{ik}$ , based on area additivity in the definition.
- Composition. Based on reciprocity and distribution, when two source areas are considered together,  $F_{i+j,k} = (A_i F_{ik} + A_j F_{jk})/(A_i + A_j)$ .

One should stress the importance of properly identifying the surfaces at work; e.g. the area of a square plate of 1 m in side may be 1 m<sup>2</sup> or 2 m<sup>2</sup>, depending on our considering one face or the two faces. Notice that the view factor from a plate 1 to a plate 2 is the same if we are considering only the frontal face of 2 or its two faces, but the view factor from a plate 1 to a plate 1 to a plate 2 halves if we are considering the two faces of 1, relative to only taking its frontal face.

For an enclosure formed by *N* surfaces, there are  $N^2$  view factors (each surface with all the others and itself). But only N(N-1)/2 of them are independent, since another N(N-1)/2 can be deduced from reciprocity relations, and N more by closeness relations. For instance, for a 3-surface enclosure, we can define 9 possible view factors, 3 of which must be found independently, another 3 can be obtained from  $A_i F_{ij} = A_j F_{ji}$ , and the remaining 3 by  $\sum_i F_{ij} = 1$ .

### View factors with two-dimensional objects

Consider two infinitesimal surface patches,  $dA_1$  and  $dA_2$ , each one on an infinitesimal long parallel strip as shown in Fig. 2. The view factor  $dF_{12}$  is given by (1), where the distance between centres,  $r_{12}$ , and the angles  $\beta_1$  and  $\beta_2$  between the line of centres and the respective normal are depicted in the 3D view in Fig. 2a, but we want to put them in terms of the 2D parameters shown in Fig. 2b (the minimum distance  $a = \sqrt{x^2 + y^2}$ , and the  $\beta_1$  and  $\beta_2$  angles when z=0,  $\beta_{10}$  and  $\beta_{20}$ ), and the depth z of the  $dA_2$  location. The relationship are:  $r_{12}=\sqrt{x^2 + y^2 + z^2} = \sqrt{a^2 + z^2}$ ,  $\cos\beta_1 = \cos\beta_{10}\cos\gamma$ , with  $\cos\beta_1 = y/r_{12} = (y/a)(a/r_{12})$ ,  $\cos\beta_{10} = y/a$ ,  $\cos\gamma = a/r_{12}$ , and  $\cos\beta_2 = \cos\beta_{20}\cos\gamma$ , therefore, between the two patches:

$$dF_{12} = \frac{\cos(\beta_1)\cos(\beta_2)}{\pi r_{12}^2} dA_2 = \frac{a^2 \cos(\beta_{10})\cos(\beta_{20})}{\pi r_{12}^4} dA_2 = \frac{a^2 \cos(\beta_{10})\cos(\beta_{20})}{\pi (a^2 + z^2)^2} dA_2$$
(3)

Fig. 2. Geometry for view-factor between two patches in parallel strips: a 3D sketch, b) profile view.

Expression (3) can be reformulated in many different ways; e.g. by setting  $d^2A_2=dwdz$ , where the 'd<sup>2</sup>' notation is used to match differential orders and dw is the width of the strip, and using the relation

 $ad\beta_{10}=\cos\beta_{20}dw$ . However, what we want is to compute the view factor from the patch  $dA_1$  to the whole strip from  $z=-\infty$  to  $z=+\infty$ , what is achieved by integration of (3) in *z*:

$$d^{2}F_{12} = \frac{a^{2}\cos(\beta_{10})\cos(\beta_{20})}{\pi(a^{2}+z^{2})^{2}}dwdz \rightarrow dF_{12} = \int_{-\infty}^{\infty} d^{2}F_{12}dz = \frac{\cos(\beta_{10})\cos(\beta_{20})}{2a}dw = \frac{\cos(\beta_{10})}{2}d\beta_{10} \quad (4)$$

For instance, approximating differentials by small finite quantities, the fraction of radiation exiting a patch of  $A_1=1$  cm<sup>2</sup>, that impinges on a parallel and frontal strip ( $\beta_{10}=\beta_{20}=0$ ) of width w=1 cm separated a distance a=1 m apart is  $F_{12}=w/(2a)=0.01/(2\cdot1)=0.005$ , i.e. a 0.5 %. It is stressed again that the exponent in the differential operator 'd' is used for consistency in infinitesimal order.

Now we want to know the view factor  $dF_{12}$  from an infinite strip  $dA_1$  (of area per unit length  $dw_1$ ) to an infinite strip  $dA_2$  (of area per unit length  $dw_2$ ), with the geometry presented in Fig. 2. It is clear from the infinite extent of strip  $dA_2$  that any patch  $d^2A_1=dw_1dz_1$  has the same view factor to the strip  $dA_2$ , so that the average coincides with this constant value and, consequently, the view factor between the two strips is precisely given by (4); i.e. following the example presented above, the fraction of radiation exiting a long strip of  $w_1=1$  cm width, that impinges on a parallel and frontal strip ( $\beta_{10}=\beta_{20}=0$ ) of width  $w_2=1$  cm separated a distance a=1 m apart is  $F_{12}=w_2/(2a)=0.01/(2\cdot1)=0.005$ , i.e. a 0.5 %.

Notice the difference in view factors between the two strips and the two patches in the same position as in Fig. 2b: using dA<sub>1</sub> and dA<sub>2</sub> in both cases, the latter (3D case) is given by the general expression (1), which takes the form  $dF_{12}=\cos\beta_{10}\cos\beta_{20}dA_2/(\pi a^2)$ , whereas in the two-strip case (2D), it is  $dF_{12}=\cos\beta_{10}\cos\beta_{20}dA_2/(2a)$ , where A<sub>2</sub> has now units of length (width of the strip).

#### Very-long triangular enclosure

Consider a long duct with the triangular cross section shown in Fig. 3. We may compute the view factor  $F_{12}$  from face 1 to face 2 (inside the duct) by double integration of the view factor from a strip of width  $dw_1$  in  $L_1$  to strip  $dw_2$  in  $L_2$ ; e.g. using de strip-to-strip view factor (4), the strip to finite band view factor is  $F_{12}=\int \cos\beta_{10}d\beta_{10}/2=(\sin\beta_{10\text{end}}-\sin\beta_{10\text{start}})/2$ , where  $\beta_{10\text{start}}$  and  $\beta_{10\text{end}}$  are the angular start and end directions subtended by the finite band 2 from infinitesimal strip 1. Let see an example to be more explicit.




Fig. 3. Triangular enclosure.

Example 1. Find the view factor  $F_{12}$  from  $L_1$  to  $L_2$  for  $\phi=90^\circ$  in Fig. 3, i.e. between two long perpendicular strips touching, by integration of the case for infinitesimal strips (4).

Sol. Referring to Fig. 2b, the view factor from a generic infinitesimal strip 1 at *x* (from the edge), to the whole band at 2, becomes  $F_{12}=(\sin\beta_{10\text{end}}-\sin\beta_{10\text{start}})/2=(1-x/\sqrt{x^2+L_2^2})/2$ , and, upon integration on *x*, we get the view factor from finite band 1 to finite band 2:  $F_{12}=(1/L_1)\int(1-x/\sqrt{x^2+L_2^2})dx/2=(L_1+L_2-\sqrt{L_1^2+L_2^2})/(2L_1)$ .

But it is not necessary to carry out integrations because all view factors in such a simple triangular enclosure can be found by simple application of the view-factor algebra presented above. To demonstrate it, we first establish the closure relation  $\sum F_{ij} = 1$  at each of the three nodes, noticing that for non-concave surfaces  $F_{ii}=0$ ; then we multiply by their respective areas (in our case  $L_1$ ,  $L_2$ ,  $L_3$ , by unit depth length); next, we apply some reciprocity relations, and finally perform de combination of equations as stated below:

$$0 + F_{12} + F_{13} = 1 \quad \to \quad L_1 F_{12} + L_1 F_{13} = L_1 \tag{5}$$

$$F_{21} + 0 + F_{23} = 1 \quad \rightarrow \quad L_2 F_{21} + L_2 F_{23} = L_2 \quad \rightarrow \quad L_1 F_{12} + L_2 F_{23} = L_2 \tag{6}$$

$$F_{31} + F_{32} + 0 = 1 \quad \rightarrow \quad L_3 F_{31} + L_3 F_{32} = L_3 \quad \rightarrow \quad L_1 F_{13} + L_2 F_{23} = L_3 \tag{7}$$

$$(5)+(6)-(7) \implies 2L_1F_{12} = L_1 + L_2 - L_3 \implies F_{12} = \frac{L_1 + L_2 - L_3}{2L_1}$$
(8)

We see how easy it is now to recover the result for perpendicular bands of width  $L_1$  and  $L_2$  solved in Example 1,  $F_{12}=(L_1+L_2-\sqrt{L_1^2+L_2^2})/(2L_1)$ ; e.g. the view factor between equal perpendicular bands is  $F_{12}=(2-\sqrt{2})/(2=0.293)$ , i.e. 29 % of the energy diffusively outgoing a long strip will directly reach an equal strip perpendicular and hinged to the former, with the remaining 71 % being directed to the other side 3 (lost towards the environment if  $L_3$  is just an opening).

Even though we have implicitly assumed straight-line cross-sections (Fig. 3), the result (8) applies to convex triangles too (we only required  $F_{ii}=0$ ), using the real curvilinear lengths instead of the straight distances. As for concave bands, the best is to apply (8) to the imaginary straight-line triangle, and afterwards solve for the trivial enclosure of the real concave shape and its corresponding virtual straight-line.

- Example 2. Find the view factor  $F_{12}$  between two long hemicylindrical strips touching with perpendicular faces (Fig. E2).
- Sol. Let 1' and 2' be the imaginary planar faces of the hemicyliners. From Example 1 applied to equal perpendicular straight strips,  $F_{1'2'}=(L_{1'}+L_{2'}-\sqrt{L_{1'}^2+L_{2'}^2})/(2L_{1'})=(2-\sqrt{2})/2=0.293$ , where  $L_{1'}=L_{2'}$  are the diametrical strips to  $L_1$  and  $L_2$  (dashed in Fig. E2), which we can take as unit length; the enclose is completed with  $F_{1'3}=1-F_{1'2'}=0,707$ . Let consider now the cylindrical surfaces; first, it is clear that the radiation arriving at 2' (from 1') will arrive at 2 also, i.e.  $F_{1'2'}=F_{1'2}$ ; second, it is obvious that  $F_{1'1}=1$ , i.e. all radiation outgoing downwards from the planar strip 1' will go to 1, and, by the reciprocity relation,  $F_{11'}=A_{1'}F_{1'1'}/A_1=1\cdot F_{1'1'}/(\pi/2)=2/\pi=0.637$ , and hence  $F_{11}=1-F_{11''}=1-2/\pi=0,363$ . In summary, from the radiation cast by hemicylinder 1, a

fraction  $F_{11}=36$  % goes against the same concave surface, and, from the remaining  $F_{11}=64$  % that goes upwards, 29 % of it goes towards the right (surface 2), and the 71 % remaining impinged on surface 3; in consequence,  $F_{12}=F_{11}\cdot F_{1'2}=0.637\cdot 0.293=(2-\sqrt{2})/\pi=0.186$ ,  $F_{13}=F_{11}\cdot F_{1'3}=0.637\cdot 0.707=\sqrt{2}/\pi=0.450$ , and  $F_{11}=1-2/\pi=0.363$  (check:  $0.363+0.186+0.450\cong1$ ).



Fig. E2. Sketch to deduce the view factor  $F_{12}$  between two long hemicylinders (1) and (2).

Now we generalise this algebraic method of computing view factors in two-dimensional geometries to non-contact surfaces.

#### The crossed string method

For any two non-touching infinitely-long bands, 1 and 2 (Fig. 4), one can also find all the view factors from simple algebraic relations as in the triangular enclosure before, extending the result (8) to what is known as crossed-string method:

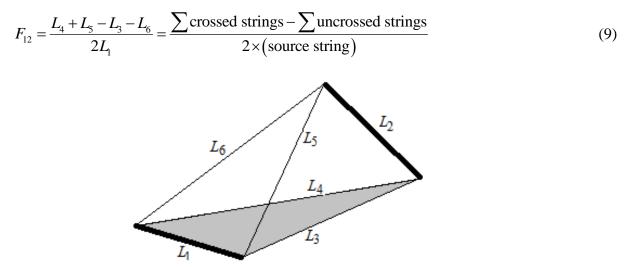


Fig. 4. Sketch used to deduce  $F_{12}$  in the general case of two infinitely long bands.

The result (9) is deduced by applying the triangular relation (8) to triangle 1-3-4 (shadowed in Fig. 4) and triangle 1-5-6, plus the closure relation to the quadrilateral 1-3-2-6 ( $F_{13}+F_{12}+F_{16}=1$ ), namely:

$$F_{13} = \frac{L_1 + L_3 - L_4}{2L_1}$$

$$F_{16} = \frac{L_1 + L_6 - L_5}{2L_1}$$

$$\rightarrow F_{12} = 1 - F_{12} - F_{12} = \frac{L_4 + L_5 - L_3 - L_6}{2L_1}$$
(10)

This procedure to compute view factors in two-dimensional configurations (the crossed-string method), was first developed by H.C. Hottel in the 1950s. The extension to non-planar surfaces 1 and 2 is as already presented for triangular enclosures. A further extension is possible to cases where there are

obstacles (two-dimensional, of course) partially protruding into sides 3 and/or 6 in the quadrilateral 1-3-2-6 (Fig. 4); it suffices to account for the real curvilinear length of each string when stretched over the obstacles, as shown in the following example.

Example 3. Find the view factor between two long parallel cylinders of equal radii *R*, separated a distance  $2\sqrt{2}R$  between centres, using the crossed-string method.

Sol. With this clever separation, angle  $\theta$  in Fig. E1 happens to be  $\theta = \pi/4$  (45°), making calculations simpler. We get  $F_{12}$  from (10) by substituting  $L_1=2\pi R$  (the source cylinder),  $L_4$  and  $L_5$  (the crossing strings) each by the length *abcde*, and  $L_3$  and  $L_6$  (the non-crossing strings) each by  $2\sqrt{2}R$  between. The length *abcde* is composed of arc *ab*, segment *bc*, and so on, which in our special case is  $ab=R\theta=(\pi/4)R$  bc=R, and  $abcde=2(ab+cd)=(\pi/2)R+2R$ , and finally  $F_{12}=(L_4+L_5-L_3-L_6)/(2L_1)=(2abcde-4\sqrt{2}R)/(4\pi R)=(\pi R+4R-4\sqrt{2}R)/(4\pi R)=1/4+(1-\sqrt{2})/\pi=0.12$ , as can be checked with the general expression for cylinders in the compilation following.




Fig. E1. Sketch used to deduce  $F_{12}$  between two infinitely long parallel cylinders.

#### View factor with an infinitesimal surface: the unit-sphere and the hemicube methods

The view factor from an infinitesimal surface  $dA_1$  to a finite surface  $A_2$ ,  $F_{12}=\int \cos(\beta_1)d\Omega_{12}/\pi$ , shows that it is the same for any surface subtending a slid angle  $\Omega_{12}$  in the direction  $\beta_1$ . Hence, a convenient way to compute  $F_{12}$ , first proposed by Nusselt in 1928, is to find the conical projection of  $A_2$  on a sphere of arbitrary radius r centred on  $dA_1$  (this projection has the same  $\Omega_{12}$ ), and then project this spherical patch on the base plane containing  $dA_1$ , as sketched in Fig. 5a (the conical projection on the sphere is  $A_s$ , and its normal projection on the base plane is  $A_p$ ). The view factor  $F_{12}$  is therefore the fraction of the circle occupied by  $A_p$ , i.e.  $F_{12}=A_p/(\pi r^2)$ . This was originally an experimental method: if an opaque reflective hemisphere is put on top of  $dA_1$ , and a photography is taken from the zenith, the measure of the reflected image of  $A_2$  ( $A_p$ ), divided by the area of the circle, yields the view factor (in practice, the radius of the sphere was taken as unity, so the unit-sphere naming).

The same reasoning can be followed changing the intermediate hemisphere by any other convex surface covering the  $2\pi$  steradians over  $dA_1$ , e.g. the hemicube method uses an intermediate hexahedron or cube centred in  $dA_1$ , what can simplify computations, since the discretization of the planar faces in small patches is simpler, and the view factors of every elementary patch in a rectangular grid on the top and

lateral faces of the hemicube can be precomputed; Fig. 5b shows the hemicube geometry in comparison with the unit-sphere geometry.

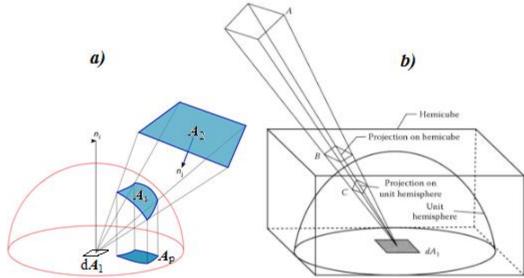


Fig. 5. a) The unit-sphere method, and b) its comparison with the hemicube method (Howell et al.).

# WITH SPHERES

# Patch to a sphere

### Frontal


Case	View factor	Plot
From a small planar		
surface facing a sphere of		1
radius <i>R</i> , at a distance <i>H</i>		0,8
from centres, with	$F_{12} = \frac{1}{h^2}$	$F_{12}^{0,6}_{0,4}$ frontal
h = H/R.	$h^{-12} h^2$	
	(e.g. for <i>h</i> =2, <i>F</i> <sub>12</sub> =1/4)	$\begin{array}{c} 0,2 \\ 0 \\ 1 \\ 1,2 \\ n \\ 1 \\ n \\ n \\ n \\ R \\ \hline R \\ \hline \end{array}$

# Level

Case	View factor	Plot
From a small planar plate (one face or both) level to a sphere of radius $R$ , at a distance $H$ from centres, with $h=H/R$ .	$F_{12} = \frac{1}{\pi} \left( \arctan \frac{1}{x} - \frac{x}{h^2} \right)$ with $x \equiv \sqrt{h^2 - 1}$ $(F_{12} _{h \to 1} \to \frac{1}{2} - \frac{2\sqrt{2}}{\pi} \sqrt{h - 1})$ (e.g. for $h=2, F_{12}=0.029$ )	$F_{12} = \frac{1}{0,8}$ $F_{12} = \frac{0,6}{0,4}$ $F_{12} = \frac{1}{0,4}$ $F_{12} = \frac{1}{1,2} = \frac{1}{1,4} = \frac{1}{1,6} = \frac{1}{1,8} = \frac{1}{R}$
$H \longrightarrow R \rightarrow$		

Tilted

Case	View factor	Plot
Cube		

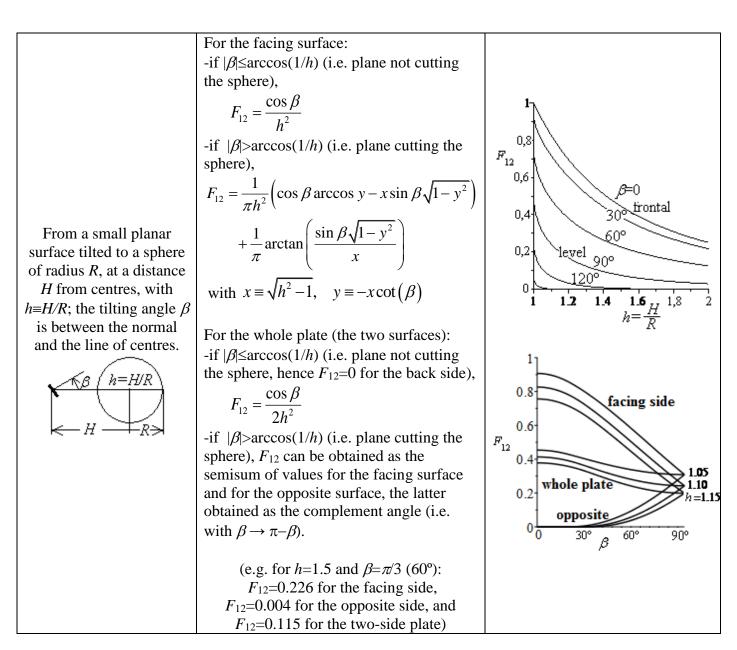

### Patch to a spherical cap

Case	View factor	Plot
From a small planar plate	$F_{12} = \sin^2 \alpha$	1 0.8
facing a spherical cap subtending a half-cone	(e.g. for $\alpha = 45^{\circ}, F_{12} = 1/2$ )	$F_{12} \stackrel{0.6}{0.4}$
angle $\alpha$ (or any other surface subtending the same solid angle).	Notice that the case 'patch to frontal sphere' above, can be recovered in our case with $\alpha_{\max} = \arcsin(R/H)$ .	$\begin{array}{c} 0.2\\ 0\\ 0\\ 0\\ \alpha  \frac{\pi}{4}  \frac{\pi}{2} \end{array}$

Ka €	
Real Provide P	

# Sphere to concentric external cylinder


Case	View factor	Plot
From a sphere (1) to interior surface of a concentric cylinder (2) of radius <i>R</i> and height 2 <i>H</i> , $h \equiv H/R$ . Sphere radius, $R_{sph}$ , is irrelevant but must be $R_{sph} \leq H$ .	$F_{12} = \frac{h}{\sqrt{1+h^2}}$ (e.g. for H=R, i.e. $h = 1, F_{12} = 0.707$ )	$F_{12} = \begin{pmatrix} 1 \\ 0.8 \\ 0.6 \\ 0.4 \\ 0.2 \\ 0 \\ 0 \\ 0 \\ 0.5 \\ 1 \\ 1.5 \\ 2 \\ h \end{pmatrix}$

# Disc to frontal sphere

Case	View factor	Plot
From a disc of radius $R_1$ to a frontal sphere of radius $R_2$ at a distance $H$ between centres (it must be $H > R_1$ ), with $h \equiv H/R_1$ and $r_2 \equiv R_2/R_1$ .	$F_{12} = 2r_2^2 \left( 1 - \frac{1}{\sqrt{1 + \frac{1}{h^2}}} \right)$ (e.g. for $h = r_2 = 1, F_{12} = 0.586$ )	$F_{12} \begin{array}{c} 0,6 \\ 0,4 \\ 0,4 \\ 0,2 \\ 0 \\ 0 \\ 0 \\ 1 \\ 2 \\ 0 \\ 0 \\ 1 \\ 2 \\ 0 \\ 1 \\ 2 \\ 0 \\ 1 \\ 2 \\ 0 \\ 1 \\ 2 \\ 0 \\ 1 \\ 1 \\ 2 \\ 1 \\ 1 \\ 1 \\ 1 \\ 1 \\ 1 \\ 1$
From a sphere of radius $R_1$ to a frontal disc of radius $R_2$ at a distance $H$ between centres (it must be $H > R_1$ , but does not depend on $R_1$ ), with $h \equiv H/R_2$ .	$F_{12} = \frac{1}{2} \left( 1 - \frac{1}{\sqrt{1 + \frac{1}{h^2}}} \right)$ (e.g. for $R_2 = H$ and $R_1 \le H, F_{12} = 0.146$ )	$F_{12} \begin{array}{c} 1,0\\0,8\\0,6\\0,2\\0\\0\\0\\0\\0\\0\\0\\0\\0\\0\\0\\0\\0\\0\\0\\0\\0\\0$

$H \rightarrow$	

### Cylinder to large sphere

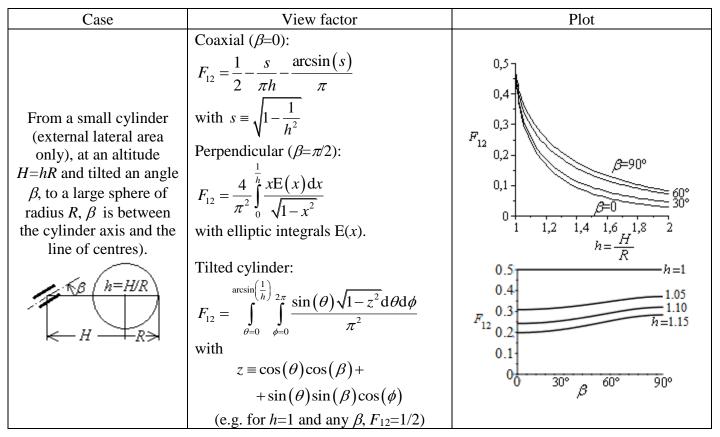

# Cylinder to its hemispherical closing cap

From a finite cylinder (surface 1) of radius R and height H, to its hemispherical closing cap (surface 2), with $F_{11} = 1 - \frac{\rho}{2}, F_{12} = F_{13} = F_{14} = \frac{\rho}{4}$ $F_{21} = \frac{\rho}{4r}, F_{22} = \frac{1}{2}, F_{23} = \frac{1}{2} - \frac{\rho}{4r},$	Case	View factor	Plot
$\begin{bmatrix} r=R/H. \text{ Let surface 3 be} \\ \text{the base, and surface 4} \\ \text{the virtual base of the} \\ \text{hemisphere.} \\ \hline \\ \hline \\ \hline \\ \hline \\ \hline \\ \hline \\ R \\ \hline \\ R$	From a finite cylinder (surface 1) of radius $R$ and height $H$ , to its hemispherical closing cap (surface 2), with r=R/H. Let surface 3 be the base, and surface 4 the virtual base of the	$F_{11} = 1 - \frac{\rho}{2}, \ F_{12} = F_{13} = F_{14} = \frac{\rho}{4}$ $F_{21} = \frac{\rho}{4r}, \ F_{22} = \frac{1}{2}, \ F_{23} = \frac{1}{2} - \frac{\rho}{4r},$ $F_{31} = \frac{\rho}{2r}, \ F_{32} = 1 - \frac{\rho}{2r}, \ F_{34} = 1 - \frac{\rho}{2r}$ with $\rho = \frac{\sqrt{4r^2 + 1} - 1}{r}$ (e.g. for $R = H, \ F_{11} = 0.38, \ F_{12} = 0.31, \ F_{21} = 0.31, \ F_{22} = 0.50, \ F_{23} = 0.19,$	$F_{12} = \frac{1}{R_{21}} + \frac{R_{22}}{R_{21}} + \frac{R_{22}}{R_{22}} + \frac{R_{22}}{R_{22}} + \frac{R_{22}}{R_{21}} + $

# Sphere to sphere

### Small to very large

	17. 6	DI /
Case	View factor	Plot
From a small sphere of		
radius $R_1$ to a much		
larger sphere of radius $R_2$		17
at a distance <i>H</i> between		0,8-
centres (it must be $H > R_2$ ,	$E = -\frac{1}{2} \left( 1 - \frac{1}{2} - \frac{1}{2} \right)$	F 0,6 12 0,4
but does not depend on	$F_{12} = \frac{1}{2} \left( 1 - \sqrt{1 - \frac{1}{h^2}} \right)$	
$R_1$ ), with $h \equiv H/R_2$ .		0,2
	(e.g. for $H=R_2$ , $F_{12}=1/2$ )	i 1,2 1,4 1,6 1,8 2
<b>6</b> <sup>1</sup>		$h = \frac{\Pi}{R}$
		12

# **Concentric spheres**

Case	View factor	Plot
Between concentric spheres of radii $R_1$ and $R_2 > R_1$ , with $r \equiv R_1/R_2 < 1$ .	$F_{12}=1 \\ F_{21}=r^2 \\ F_{22}=1-r^2$	F 0,6 21 0,4 0,2 0 0,2 0,4 0,6 0,8 1,0
	(e.g. for $r=1/2$ , $F_{12}=1$ , $F_{21}=1/4$ , $F_{22}=3/4$ )	$r = \frac{R_1}{R_2}$


# Sphere to concentric hemisphere

Case	View factor	Plot
From a sphere of radius $R_1$ to a larger concentric hemisphere of radius $R_2 > R_1$ , with $R \equiv R_2/R_1 > 1$ . Let the enclosure be '3'.	$F_{12}=1/2, F_{13}=1/2, F_{21}=1/R^{2},$ $F_{23}=1-F_{21}-F_{22}, F_{22}=\frac{1}{2}\left(1-\frac{1-\rho}{R^{2}}\right)$ with $\rho=\frac{1}{2}-\frac{1}{\pi}\left[\sqrt{R^{2}-1}-\left(R^{2}-2\right)\arcsin\left(\frac{1}{R}\right)\right]$ (e.g. for $R=2, F_{12}=1/2, F_{21}=1/4, F_{13}=1/2,$ $F_{23}=0.34, F_{22}=0.41$ )	$F_{0,6}^{1}$ $F_{21}^{1}$ $F_{0,6}^{1}$ $F_{21}^{1}$ $F_{22}^{1}$ $F_{23}^{1}$

# Hemispheres

### Concentric hemispheres

Case View factor Plot
-----------------------

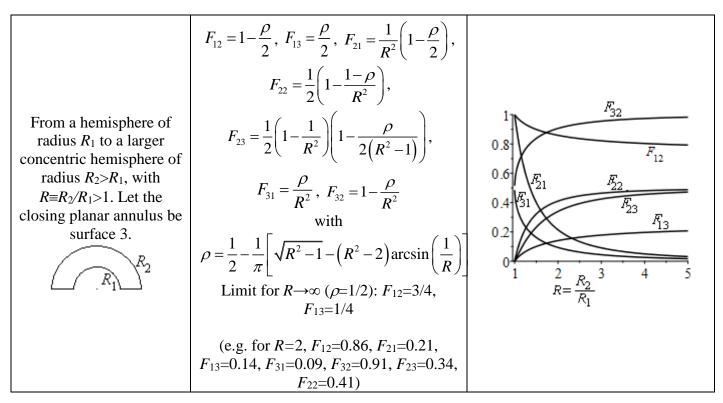


### Small hemisphere frontal to large sphere

Case	View factor	Plot
From a small hemisphere (one face) to a large frontal sphere of radius $R$ at a distance $H \ge R$ between centres, with h = H/R.	$F_{12} = \frac{1}{2} \left( 1 - \sqrt{1 - \frac{1}{h^2}} + \frac{1}{2h^2} \right)$ (e.g. for $H = R, F_{12} = 3/4$ )	$F_{12} \begin{array}{c} 0.8 \\ 0.6 \\ 0.2 \\ 0.2 \\ 0 \\ 1.2 \\ 1.4 \\ 1.6 \\ 1.8 \\ 2 \\ h \end{array}$

#### Hemisphere to planar surfaces

Case	View factor	Plot
From a hemisphere of		
radius R (surface 1) to its	$F_{21} = 1$	
base circle (surface 2).	$F_{12} = A_2 F_{21} / A_1 = 1/2$	
	$F_{11}=1-F_{12}=1/2$	
	(coincides with Small hemisphere	
From a convex	frontal to large sphere at $H=R$ )	
hemisphere (1) to an	$F_{12}=3/4=0.75$	
infinite plane (2). Let the	$F_{13}=1/4=0.25$	
enclosure be '3'.	$F_{21}=0, F_{23}=1$	

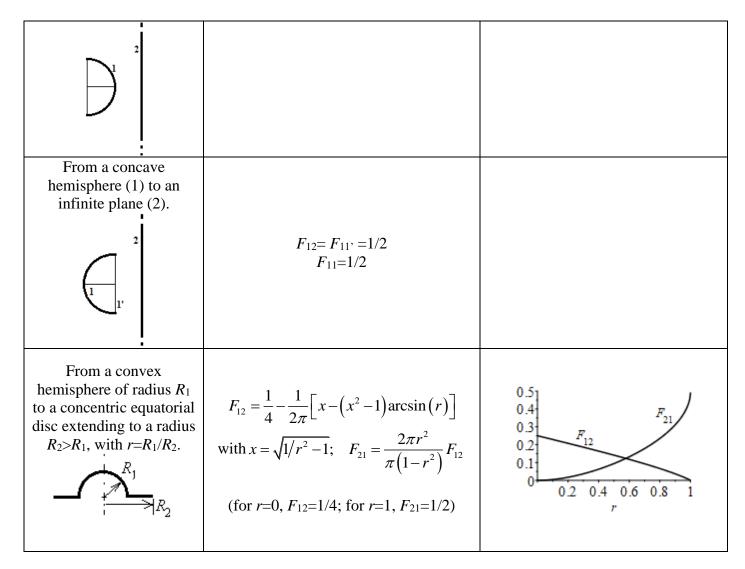

### Spherical cap to base disc

Case	View factor	Plot
From a disc of radius $R$ (surface 1) to a closing spherical cap of height $H$ (surface 2), with $h=H/R$ . The radius of the sphere is $(R^2+H^2)/(2H)$ .	$F_{12} = 1$ $F_{21} = \frac{A_1}{A_2} F_{12} = \frac{R^2}{R^2 + H^2} = \frac{1}{1 + h^2} = \cos^2 \frac{\theta}{2}$ $F_{22} = \frac{h^2}{1 + h^2} = \sin^2 \frac{\theta}{2}$ (e.g. for <i>h</i> =1, i.e. $\theta$ =90°, $F_{21}$ = <i>F</i> <sub>22</sub> =1/2)	$F_{12} \begin{array}{c} 0.8 \\ 0.6 \\ 0.2 \\ 0 \\ 0.5 \\ 1 \\ 1.5 \\ 2 \\ 0 \\ 0.5 \\ 1 \\ 1.5 \\ 2 \\ 0 \\ 0.5 \\ 1 \\ 1.5 \\ 2 \\ 0 \\ 0.5 \\ 1 \\ 1.5 \\ 2 \\ 0 \\ 0.5 \\ 1 \\ 1.5 \\ 2 \\ 0 \\ 0.5 \\ 1 \\ 1.5 \\ 2 \\ 0 \\ 0.5 \\ 1 \\ 1.5 \\ 2 \\ 0 \\ 0.5 \\ 1 \\ 1.5 \\ 2 \\ 0 \\ 0.5 \\ 1 \\ 1.5 \\ 2 \\ 0 \\ 0.5 \\ 1 \\ 1.5 \\ 2 \\ 0 \\ 0.5 \\ 1 \\ 1.5 \\ 2 \\ 0 \\ 0.5 \\ 1 \\ 1.5 \\ 2 \\ 0 \\ 0.5 \\ 1 \\ 1.5 \\ 2 \\ 0 \\ 0.5 \\ 1 \\ 1.5 \\ 2 \\ 0 \\ 0.5 \\ 1 \\ 1.5 \\ 2 \\ 0 \\ 0.5 \\ 1 \\ 1.5 \\ 2 \\ 0 \\ 0.5 \\ 1 \\ 0.5 \\ 0.6 \\ 0.4 \\ 0.2 \\ 0 \\ 0.5 \\ 1 \\ 1.5 \\ 2 \\ 0 \\ 0.5 \\ 1 \\ 0.5 \\ 0.6 \\ 0.4 \\ 0.2 \\ 0 \\ 0.5 \\ 0.6 \\ 0.4 \\ 0.2 \\ 0 \\ 0.5 \\ 0.6 \\ 0.4 \\ 0.2 \\ 0 \\ 0.5 \\ 0.6 \\ 0.4 \\ 0.2 \\ 0 \\ 0.5 \\ 0.6 \\ 0.4 \\ 0.2 \\ 0 \\ 0.5 \\ 0.5 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ $

# WITH CYLINDERS

# Cylinder to large sphere

See results under 'Cases with spheres'.

# Cylinder to its hemispherical closing cap

See results under 'Cases with spheres'.

# Very-long cylinders

### **Concentric cylinders**

Case	View factor	Plot
Between concentric infinite cylinders of radii $R_1$ and $R_2 > R_1$ , with $r \equiv R_1/R_2 < 1$ .	$F_{12}=1$ $F_{21}=r$ $F_{22}=1-r$	1,0 0,8 Fr 0,6 21 0,4 0,2 0
$( R_1)_{R_2}$	(e.g. for $r=1/2$ , $F_{12}=1$ , $F_{21}=1/2$ , $F_{22}=1/4$ )	0 0,2 0,4 0,6 0,8 1,0 $r = \frac{R_1}{R_2}$

# Concentric cylinder to hemi-cylinder

Case	View factor	Plot
From very-long cylinder of radius $R_1$ to concentric hemi-cylinder of radius $R_2 > R_1$ , with $r \equiv R_1/R_2 < 1$ . Let the enclosure be '3'.	$F_{12}=1/2, F_{21}=r, F_{13}=1/2,$ $F_{23}=1-F_{21}-F_{22},$ $F_{22}=1-\frac{2}{\pi} \left(\sqrt{1-r^2}+r \arcsin r\right)$ (e.g. for $r=1/2, F_{12}=1/2, F_{21}=1/2,$ $F_{13}=1/2, F_{23}=0.22, F_{22}=0.28)$	$F = \frac{\frac{1}{R_2}}{\frac{R_1}{R_2}}$

### **Concentric frontal hemi-cylinders**

Case	View factor	Plot
From very-long hemi- cylinder of radius $R_1$ to concentric hemi-cylinder of radius $R_2 > R_1$ , with $r \equiv R_1/R_2 < 1$ . Let '3' be the closing surface (i.e. the two planar strips).	$F_{12} = 1 - \frac{\arccos(r)}{\pi} + \frac{1}{\pi r} \left( \sqrt{1 - r^2} + r - 1 \right)$ (limit for $r \rightarrow 0$ : $F_{12} = \frac{1}{2} + \frac{1}{\pi} = 0.82$ ), $F_{11} = 0, F_{13} = 1 - F_{12}, F_{31} = \frac{\pi r F_{13}}{2(1 - r)}$ , $F_{33} = 0, F_{32} = 1 - F_{31}, F_{23} = \frac{2(1 - r) F_{32}}{\pi}$ , $F_{21} = r F_{12}, F_{22} = 1 - F_{21} - F_{23}$ , $F_{22} = 1 - r + \frac{2}{\pi} \left( r \arccos(r) - \sqrt{1 - r^2} \right)$	$F_{2,i}^{0.8} \xrightarrow{F_{2}}^{0.6} F_{$

(e.g. for $r=1/2$ : $F_{11}=0, F_{12}=0.90, F_{13}=0.10,$ $F_{21}=0.45, F_{22}=0.28, F_{23}=0.27$ $F_{31}=0.16, F_{32}=0.84, F_{33}=0)$	$ \begin{array}{c} 1 \\ 0.8 \\ F_{3,i} \\ 0.4 \\ 0.2 \\ 0 \\ 0.2 \\ 0.4 \\ 0.6 \\ 0.2 \\ 0.2 \\ 0.4 \\ 0.6 \\ 0.8 \\ 1 \\ r \\ r \\ \end{array} $
--	---

# Concentric opposing hemi-cylinders

Case	View factor	Plot
From very-long hemi- cylinder of radius $R_1$ to concentric hemi-cylinder of radius $R_2 > R_1$ , with $r = R_1/R_2 < 1$ . Let '3' be the closing surface (i.e. the two planar strips).	$F_{11} = 1 - \frac{2}{\pi} = 0.36, \ F_{12} = \frac{2}{\pi} = 0.64, \ F_{13} = 0,$ $F_{21} = \frac{2r}{\pi}, \ F_{22} = 1 - \frac{2}{\pi} = 0.36, \ F_{23} = \frac{2(1-r)}{\pi}$ $F_{31} = 0, \ F_{32} = 1, \ F_{33} = 0$ (e.g. for $r = 1/2$ : $F_{11} = 0.36, \ F_{12} = 0.64, \ F_{13} = 0,$ $F_{21} = 0.32, \ F_{22} = 0.36, \ F_{23} = 0.32$ $F_{31} = 0, \ F_{32} = 1, \ F_{33} = 0$	$F_{ij} = \frac{F_{12}}{0.4}$

### Hemi-cylinder to central strip

Case	View factor	Plot
From very-long hemi- cylinder of radius $R$ to symmetrically placed central strip of width $W$ , with $w \equiv W/R < 2$ . Let the enclosure be '3'.	F <sub>11</sub> = $1 - \frac{2}{\pi} = 0.363$ , $F_{12} = \frac{w}{\pi}$ , $F_{13} = \frac{2 - w}{\pi}$ ) (e.g. for $w = 1$ , $F_{12} = F_{13} = 0.318$ , $F_{11} = 0.363$ )	Piot $1 \\ 0.8 \\ 0.6 \\ 0.4 \\ 0.2 \\ 0 \\ 0.5 \\ 1 \\ 1.5 \\ 2 \\ w$

## Hemi-cylinder to infinite plane

	*	
Case	View factor	Plot
From convex hemi- cylinder to frontal plane. Let the enclosure be '3'.	$F_{11} = 0$ $F_{12} = \frac{1}{2} + \frac{1}{\pi} = 0.82$ $F_{13} = \frac{1}{2} - \frac{1}{\pi} = 0.18$	
From hemi-cylinder to	Concave side:	

plane. Let 1 be the concave side, 1' the convex side, 1" the diametrical section, and 3 the enclosure.	$F_{11} = 1 - \frac{2}{\pi} = 0.36$ $F_{12} = F_{11"} = \frac{2}{\pi} = 0.64$	
	$F_{13} = 0$ Convex side: $F_{1'2} = \frac{1}{2} - \frac{1}{\pi} = 0.18$ $F_{1'3} = \frac{1}{2} + \frac{1}{\pi} = 0.82$	


# Equal external cylinders

Case	View factor	Plot
CaseFrom a cylinder of radius $R$ to an equal cylinder ata distance $H$ betweencentres (it must be $H>2R$ ), with $h=H/R$ . $R$	View factor $F_{12} = \frac{\sqrt{h^2 - 4} - h + 2 \arcsin \frac{2}{h}}{2\pi}$	Plot
<u>Note</u> . See the crossing- string method, above.	(e.g. for $H=2R$ , $F_{12}=1/2-1/\pi=0.18$ )	$ \begin{array}{c} 0 \\ 2 \\ n \\ n \\ n \\ n \\ \hline R \end{array} $

# Equal external hemi-cylinders

Case	View factor	Plot
From a hemi-cylinder of radius <i>R</i> to an equal hemi-cylinder separated a distance <i>W</i> , with $r=R/W$ (w=W/R=1/r). Let the strip in between be (3).	$F_{12} = 1 - \frac{2}{\pi} + \frac{4}{\pi r} \left( 1 - \sqrt{1 + r} + \frac{r}{2} \arccos \frac{r}{2 + r} \right)$ (limit for $r \rightarrow \infty$ : $F_{12} = 1 - \frac{2}{\pi} = 0.36$ ) $F_{13} = \frac{1}{2\pi r} \left( 1 + r \arccos \frac{r}{1 + r} - \sqrt{1 + 2r} \right)$ (limit for $r \rightarrow 0$ : $F_{13} = \frac{1}{4} - \frac{1}{2\pi} = 0.091$ ) (e.g. for $r = 1$ , $F_{12} = 0.11$ , $F_{13} = 0.05$ )	$\begin{array}{c} 0.5 \\ 0.4 \\ 0.3 \\ 0.2 \\ 0.1 \\ 0 \\ 2 \\ 4 \\ 6 \\ 8 \\ 10 \\ r \\ r \\ 0.5 \\ 0.4 \\ 0.3 \\ 0.2 \\ F_{12} \\ 0.1 \\ 0 \\ 1 \\ 2 \\ 3 \\ 4 \\ 5 \\ W \end{array}$

Planar strip to cylinder		
Case	View factor	Plot

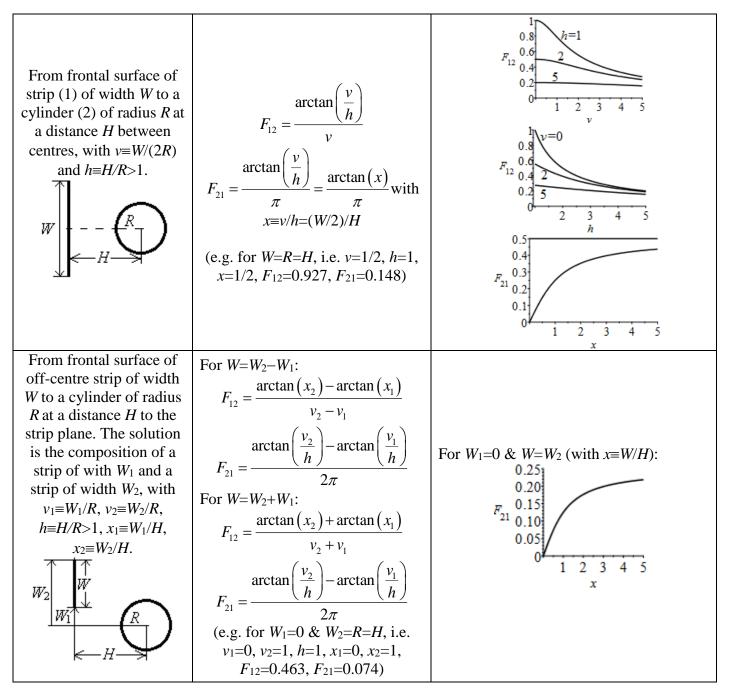

#### Wire to parallel cylinder

Case	View factor	Plot
	view factor	1 10t
From a small infinite		
long cylinder to an		1,0 <sub>1</sub>
infinite long parallel	1	0,8-
cylinder of radius R, with	$\arcsin\frac{1}{L}$	$F_{12} 0,6$
a distance <i>H</i> between	$F_{12} = \frac{n}{2}$	1
axes, with $h \equiv H/R$ .	$\pi$	0,2
$\frown$		1,0 1,2 1,4 1,6 1,8 2,0
(R)	(e.g. for $H=R$ , $F_{12}=1/2$ )	$h = \frac{H}{2}$
		~ R
$H \rightarrow H$		

# **Finite cylinders**

# Base to lateral surface


Case	View factor	Plot
From base (1) to lateral surface (2) in a cylinder of radius <i>R</i> and height <i>H</i> , with $r \equiv R/H$ . Let (3) be the opposite base.	F <sub>12</sub> = $\frac{\rho}{2r}$ , $F_{13} = 1 - \frac{\rho}{2r}$ , $F_{21} = \frac{\rho}{4}$ , $F_{22} = 1 - \frac{\rho}{2}$ , $F_{23} = \frac{\rho}{4}$ with $\rho = \frac{\sqrt{4r^2 + 1} - 1}{r}$ (e.g. for <i>R</i> = <i>H</i> , $F_{12}$ =0.62, $F_{21}$ =0.31, $F_{13}$ =0.38, $F_{22}$ =0.38)	Flot $F_{0,8}^{0,8}$ $F_{0,6}^{0,4}$ 0,4 0,2 0 1 2 22 0 1 2 23 $F_{13}^{-}$ $F_{23}^{-}$ $F_{2}^{-}$ $F_{2}^{-}$ $r_{2}^{-}$

# Disc to coaxial cylinder


Case	View factor	Plot
From disc (1) of radius $R_1$ at a distance $H_1$ , to internal lateral surface (2) of a coaxial cylinder of radius $R_2 > R_1$ and height $H_2 - H_1$ , with $h_1 = H_1/R_1$ , $h_2 = H_2/R_1$ , $r = R_2/R_1$ .	$F_{12} = \frac{1}{2} \Big[ (x_1 - x_2) - (y_1 - y_2) \Big]$ with $x_1 = 1 + r^2 + h_1^2,  y_1 = \sqrt{x_1^2 - 4r^2}$ $x_2 = 1 + r^2 + h_2^2,  y_2 = \sqrt{x_2^2 - 4r^2}$ (e.g. for $H_1 = 0$ & $H_2 = R_2 = R_1$ , i.e. for $r = 1$ , $h_1 = 0$ & $h_2 = 1$ , $F_{12} = 0.62$ )	Disc of same radius (i.e. $R_2 = R_1$ and $r=1$ ) $F_{12} 0.4$ 0.6 0.2 0.2 0.4 0.6 0.2 0.2 0.4 0.6 0.8 $h_1$ Disc at the base (i.e. $H_1=0$ , with $h=h_2$ ) $F_{12} 0.4$ 0.6 0.8 r=1 0.8 r=1 0.8 r=1 0.8 0.6 0.8 0.6 0.8 0.6 0.8 0.6 0.8 0.6 0.8 0.6 0.8 0.6 0.8 0.6 0.8 0.6 0.8 0.6 0.8 0.6 0.8 0.6 0.8 0.6 0.4 0.2 0.4 0.5 0.4 0.5 0.4 0.5 0.4 0.5 0.4 0.5 0.4 0.5 0.4 0.5 0.4 0.5 0.4 0.5 0.4 0.5 0.4 0.5 0.5 0.4 0.5 0.4 0.5 0.5 0.5 0.5 0.6 0.5 0.6 0.7 0.7 0.8 0.6 0.8 0.8 0.8 0.8 0.8 0.8 0.6 0.4 0.5 0.8 0.5 0.8 0.5 0.6 0.5

# Equal finite concentric cylinders

Case	View factor	Plot
Between finite concentric cylinders of radius $R_1$ and $R_2 > R_1$ and height $H$ , with $h=H/R_1$ and $R=R_2/R_1$ . Let the enclosure be '3'. For the inside of '1', see previous case.	$\begin{split} F_{12} = 1 - \frac{1}{\pi} \bigg( \arccos \frac{f_2}{f_1} - \frac{f_4}{2h} \bigg), \ F_{13} = 1 - F_{12}, \\ F_{22} = 1 - \frac{1}{R} + \frac{2}{\pi R} \arctan \frac{2\sqrt{R^2 - 1}}{h} - \frac{hf_7}{2\pi R}, \\ F_{23} = 1 - F_{21} - F_{22} \\ \text{with } f_1 = h^2 + R^2 - 1, \ f_2 = h^2 - R^2 + 1, \\ f_3 = \sqrt{\left(f_1 + 2\right)^2 - 4R^2}, \\ f_4 = f_3 \arccos \frac{f_2}{Rf_1} + f_2 \arcsin \frac{1}{R} - \frac{\pi f_1}{2}, \end{split}$	$F_{12} 0,4 0,2 0,1 0,1 0,1 0,1 0,1 0,1 0,1 0,1 0,1 0,1$

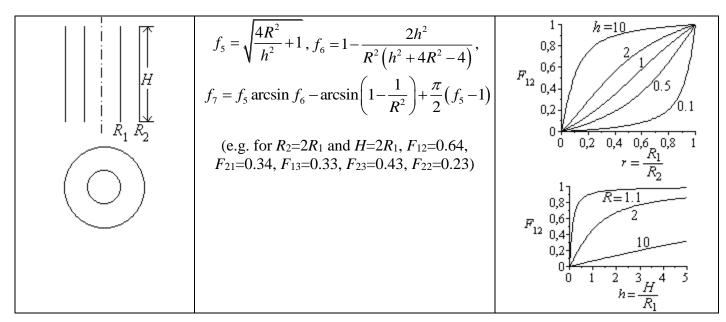

#### Outer surface of cylinder to annular disc joining the base

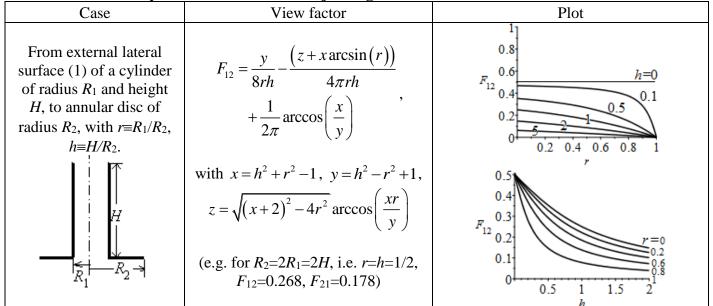

#### Cylindrical rod to coaxial disc at one end

Case	View factor	Plot
Thin rod $(1)$ of height $H$ ,		
to concentric disc (2) of		0.5
radius R placed at one	2	0.4
end, with $h \equiv H/R$ .	$F_{12} = \frac{1}{4} - \frac{1}{2} \arcsin \frac{h^2 - 1}{L^2 - 1}$	F 0.3
	$F_{12} = \frac{1}{4} - \frac{1}{2\pi} \arcsin \frac{h^2 - 1}{h^2 + 1},$	<sup>1</sup> <sup>12</sup> 0.2
		0.1
Н		04
	(e.g. for $R=H$ , i.e. $h=1$ , $F_{12}=1/4$ )	$0.5 \ 1 \ 1.5 \ 2 \ h$
V		7

# WITH PLATES AND DISCS

# **Parallel configurations**

### Patch to disc

Case	View factor	Plot
From a patch to a parallel and concentric disc of radius <i>R</i> at distance <i>H</i> , with $h=H/R$ .	$F_{12} = \frac{1}{1+h^2}$ (e.g. for <i>h</i> =1, <i>F</i> <sub>12</sub> =0.5)	$F_{12} \begin{array}{c} 0,6 \\ 0,6 \\ 0,2 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ $

### Patch to annulus

Case	View factor	Plot
From a patch to a parallel and concentric annulus of inner radius $R_1$ and outer radius $R_2$ , at distance $H$ , with $r_1=R_1/H$ and $r_2=R_2/H$ .	$F_{12} = \frac{r_2^2}{1 + r_2^2} - \frac{r_1^2}{1 + r_1^2}$ (e.g. for $r_1$ =1 and $r_2$ =2, $F_{12}$ =0.30)	$F_{12} \begin{array}{c} 0.8 \\ 0.6 \\ 0.4 \\ 0.2 \\ 0 \end{array} \begin{array}{c} 0 \\ 1 \\ 2 \\ r_2 \end{array} \begin{array}{c} 0 \\ 0 \\ r_1 = 1 \\ r_2 \\ r_2 \end{array} \begin{array}{c} 0 \\ 0 \\ r_1 = 1 \\ r_2 \\ r_2 \end{array}$


### Patch to rectangular plate

**Equal square plates** 

Î	1		
	Case	View factor	Plot
			·

Between two identical  
parallel square plates of  
side L and separation H,  
with 
$$w=W/H$$
.  
W  
H  
(e.g. for W=H, F<sub>12</sub>=0.1998)  
$$F_{12} = \frac{1}{\pi w^2} \left( \ln \frac{x^4}{1+2w^2} + 4wy \right)$$

#### Equal rectangular plates

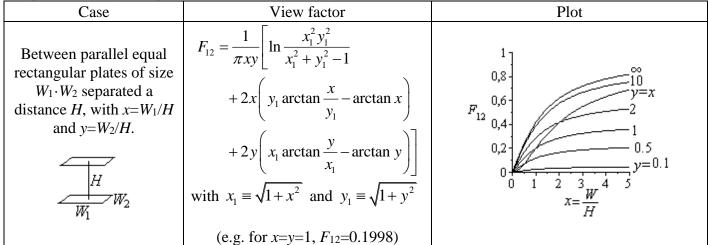


### **Rectangle to rectangle**

Case	View factor	Plot
From rectangle $A_1$ in		
parallel plane to	$\mathbf{r} = \begin{bmatrix} 1 & \frac{2}{2} & \frac{2}{2} & \frac{2}{2} \\ \frac{2}{2} & \frac{2}{2} & \frac{2}{2} \end{bmatrix} \begin{bmatrix} (-1)^{(i+i+k+l)} & \mathbf{r} \end{bmatrix}$	
rectangle $A_2$ .	$F_{12} = \frac{1}{2\pi A_1} \sum_{l=1}^{2} \sum_{k=1}^{2} \sum_{j=1}^{2} \sum_{i=1}^{2} \left[ \left( -1 \right)^{(i+j+k+l)} B\left( x_i, y_j, \eta_k, \xi_l \right) \right]$	
MI N TR	with $A_1 = (x_2 - x_1)(y_2 - y_1)$	
EL EL	$B = vp \arctan\left(\frac{v}{p}\right) + uq \arctan\left(\frac{u}{q}\right) - \frac{z^2}{2}\ln\left(u^2 + v^2 + z^2\right)$	
z y1 y y2 y A1 7	$u = x - \xi$ , $v = y - \eta$ , $p = \sqrt{u^2 + z^2}$ , $q = \sqrt{v^2 + z^2}$	
	(e.g. for frontal squares in a cube:	
x1 x x2 x	$x_1 = \xi_1 = 0, x_2 = \xi_2 = 1, y_1 = \eta_1 = 0, y_2 = \eta_2 = 1, z = 1, F_{12} = 0.1998$	

#### **Unequal coaxial square plates**

		—		
Case View factor Plot	Plot	View factor	Case	

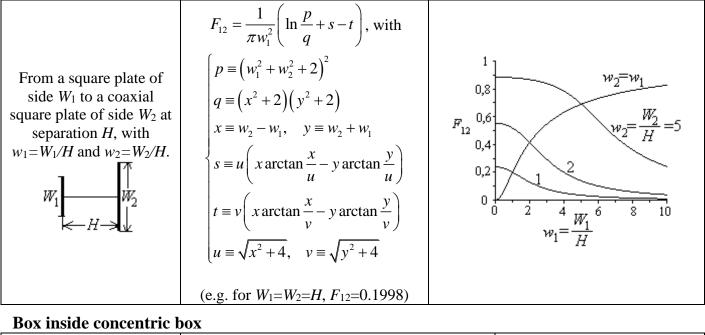

Box inside concentric b	DOX	
Case	View factor	Plot
Between all faces in the enclosure formed by the internal side of a cube box (faces 1-2-3-4-5-6), and the external side of a concentric cubic box (faces (7-8-9-10-11-12) of size ratio $a \le 1$ .	View factor From an external-box face: $\begin{cases} F_{11} = 0, F_{12} = x, F_{13} = y, F_{14} = x, \\ F_{15} = x, F_{16} = x, F_{17} = za^2, F_{18} = r, \\ F_{19} = 0, F_{1,10} = r, F_{1,11} = r, F_{1,12} = r \end{cases}$ From an internal-box face: $\begin{cases} F_{71} = z, F_{72} = (1 - z)/4, F_{73} = 0, F_{74} = (1 - z)/4, \\ F_{75} = (1 - z)/4, F_{76} = (1 - z)/4, F_{77} = 0, F_{78} = 0, \\ F_{79} = 0, F_{7,10} = 0, F_{7,11} = 0, F_{7,12} = 0 \end{cases}$ with z given by: $\begin{cases} z = F_{71} = \frac{(1 - a)^2}{4\pi a^2} \left( \ln \frac{p}{q} + s + t \right) \\ p = \left( 2\frac{3 - 2a + 3a^2}{(1 - a)^2} \right)^2 \\ q = 2\frac{18 + 12a + 18a^2}{(1 - a)^2} \\ s = u \left( 2 \arctan \frac{2}{u} - w \arctan \frac{w}{u} \right) \end{cases}$	From face 1 to the others: 1 0,8 0,6 0,4 $F_{1j}$ 0,2 0,4 0,4 0,4 0,4 0,4 0,4 0,4 0,4 0,2 0,4 0,2 0,4 0,2 0,4 0,2 0,4 0,5 0,4 0,4 0,5 0,4 0,5 0,4 0,5 0,4 0,5 0,4 0,5 0,5 1,0 0,4 0,5 0,5 1,0 0,4 0,6 0,8 1,0 0,4 0,6 0,8 1,0 1 0,6 0,8 1,0 1 0,6 0,8 1,0 1 1 1 0,6 0,7 1 0,6 0,8 1,0 1 1 1 0,6 0,7 1 0,6 0,8 1,0 1 1 0,6 0,7 1 0,6 0,7 1 0,6 0,7 1 0,7 1 0,7 1 0,7 1 0,7 1 0,7 1 0,7 1 0,7 1 1 0,7 1 1 1 1 1 1 1 1
face #7 in the inner box, have been chosen.)	$t \equiv v \left( 2 \arctan \frac{2}{v} - w \arctan \frac{w}{v} \right)$ $u \equiv \sqrt{8}, v \equiv \frac{\sqrt{8(1+a^2)}}{1-a}, w \equiv 2\frac{1+a}{1-a}$ and:	$\begin{array}{c} 0, a \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\$

been found.
-------------

# **Equal discs**


Case	View factor	Plot
Between two identical		17
coaxial discs of radius R		0,8-
and separation <i>H</i> , with	$r = 1 + 1 - \sqrt{4r^2 + 1}$	F 0,6
r=R/H.	$F_{12} = 1 + \frac{2r^2}{2r^2}$	<sup>- 12</sup> 0,4-
		0,2-
	(e.g. for <i>r</i> =1, <i>F</i> <sub>12</sub> =0.382)	0 <del>1 </del>
		$r = \frac{1}{2} \frac{3}{2} \frac{4}{R} \frac{3}{4} \frac{3}{5}$
J<−H→3		$r = \overline{H}$

# **Unequal discs**

From a disc of radius $R_1$ to a coaxial parallel disc of radius $R_2$ at separation $H$ , with $r_1 = R_1/H$ and $r_2 = R_2/H$ . $R_1$ $R_1$ $R_2$ $R_1$ $R_1$ $R_2$ $R_1$ $R_2$ $R_1$ $R_2$ $R_2/H$ . $R_1$ $R_1$ $R_2$ $R_2/H$ . $R_1$ $R_2$ $R_2/H$ . $R_1$ $R_2$ $R_2/H$ . $R_1$ $R_2$ $R_2/H$ . $R_1$ $R_2$ $R_2/H$ . $R_1$ $R_2$ $R_2/H$ . $R_1$ $R_2$ $R_2/H$ . $R_1$ $R_2$ $R_2/H$ . $R_1$ $R_2$ $R_2/H$ . $R_1$ $R_2$ $R_2/H$ . $R_1$ $R_2$ $R_2$ $R_1$ $R_2$ $R_2$ $R_1$ $R_2$ $R_2$ $R_1$ $R_2$ $R_2$ $R_1$ $R_2$ $R_2$ $R_1$ $R_2$ $R_2$ $R_1$ $R_2$ $R_2$ $R_2$ $R_1$ $R_2$ $R_2$ $R_1$ $R_2$ $R_2$ $R_1$ $R_2$ $R_2$ $R_1$ $R_2$ $R_2$ $R_1$ $R_2$ $R_2$ $R_2$ $R_1$ $R_2$ $R_2$ $R_1$ $R_2$ $R_2$ $R_2$ $R_2$ $R_2$ $R_1$ $R_2$ $R_2$ $R_2$ $R_2$ $R_1$ $R_2$	Case	View factor	Plot
$\begin{array}{ c c c c c c c c c c c c c c c c c c c$	to a coaxial parallel disc of radius $R_2$ at separation $H$ , with $r_1=R_1/H$ and $r_2=R_2/H$ .	with $x = 1 + 1/r_1^2 + r_2^2/r_1^2$ and	$F_{12} \begin{array}{c} 0, 0 \\ 0, 0 \\ 0, 0 \\ 0, 0 \\ 0 \\ 0, 0 \\ 0 \\$

# Patch to infinite plate

Case View factor Plot
-----------------------

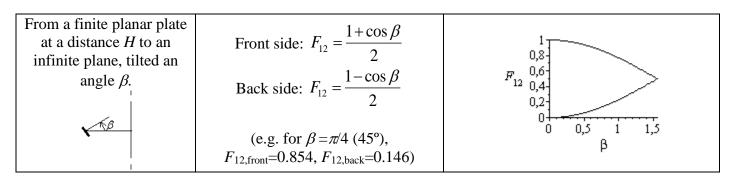

# **Perpendicular configurations**

### Patch to rectangular plate

Case	View factor	Plot
From small planar patch at 90° to rectangular plate of sides <i>H</i> and <i>W</i> at a separation <i>L</i> , with $h=H/W$ and $\ell=L/W$ .	$F_{12} = \frac{1}{2\pi} \left( \arctan \frac{1}{\ell} - \frac{\ell}{z} \arctan \frac{1}{z} \right)$ with $z \equiv \sqrt{h^2 + \ell^2}$ (e.g. for $W=H=L, F_{12}=0.124$ )	$F_{12} = \frac{0.25}{0.15} + 10$

### Square plate to rectangular plate

Case	View factor	Plot
From a square plate of with $W$ to an adjacent rectangles at 90°, of height $H$ , with $h=H/W$ .	$F_{12} = \frac{1}{4} + \frac{1}{\pi} \left[ h \arctan \frac{1}{h} - h_1 \arctan \frac{1}{h_1} - \frac{h^2}{4} \ln h_2 \right]$ with $h_1 = \sqrt{1 + h^2}$ and $h_2 = \frac{h_1^4}{h^2 \left(2 + h^2\right)}$	1 0,8 <i>F</i> <sub>12</sub> 0,6 0,4 0,2
H W	(e.g. for $h = \rightarrow \infty$ , $F_{12} = \rightarrow 1/4$ , for $h=1$ , $F_{12}=0.20004$ , for $h=1/2$ , $F_{12}=0.146$ )	$h = \frac{H}{W}$

### Rectangular plate to equal rectangular plate

Case	View factor	Plot
Between adjacent equal rectangles at 90°, of height <i>H</i> and width <i>L</i> , with $h=H/L$ .	$F_{12} = \frac{1}{\pi} \left[ 2 \arctan\left(\frac{1}{h}\right) - \sqrt{2} \arctan\left(\frac{1}{\sqrt{2}h}\right) + \frac{1}{4h} \ln\left(\frac{h_1h_2}{4}\right) \right]$ with $h_1 = 2\left(1 + h^2\right)$ and $h_2 = \left(1 - \frac{1}{h_1}\right)^{2h^2 - 1}$ (e.g. for $h = 1, F_{12} = 0.20004$ )	$F_{12} \begin{array}{c} 0,8\\ 0,6\\ 0,6\\ 0,4\\ 0,2\\ 0\\ 0\\ 0\\ 1\\ 2\\ 0\\ 0\\ 1\\ 2\\ 3\\ h = \frac{H}{L}$

### Rectangular plate to unequal rectangular plate

Case	View factor	Plot
From a horizontal rectangle of $W \cdot L$ to adjacent vertical rectangle of $H \cdot L$ , with h=H/L and $w=W/L$ .	$F_{12} = \frac{1}{\pi w} \left[ h \arctan\left(\frac{1}{h}\right) + w \arctan\left(\frac{1}{w}\right) - \sqrt{h^2 + w^2} \arctan\left(\frac{1}{\sqrt{h^2 + w^2}}\right) + \frac{1}{4} \ln\left(ab^{w^2}c^{h^2}\right) \right]$ with $a = \frac{(1+h^2)(1+w^2)}{1+h^2+w^2}$ , $b = \frac{w^2(1+h^2+w^2)}{(1+w^2)(h^2+w^2)}$ , $c = \frac{h^2(1+h^2+w^2)}{(1+h^2)(h^2+w^2)}$	$F_{12} \begin{array}{c} 0,6 \\ 0,6 \\ 0,4 \\ 0,2 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ $
	(e.g. for $h=w=1$ , $F_{12}=0.20004$ )	
From non-adjacent rectangles, the solution can be found with view- factor algebra as shown here 1 1' 2' $2$	$F_{1\to2} = F_{1\to2+2'} - F_{1\to2'} = \frac{A_{2+2'}}{A_1} F_{2+2'\to1} - \frac{A_{2'}}{A_1} F_{2'\to1} =$ $= \frac{A_{2+2'}}{A_1} \left( F_{2+2'\to1+1'} - F_{2+2'\to1'} \right) - \frac{A_{2'}}{A_1} \left( F_{2'\to1+1'} - F_{2'\to1'} \right)$	

#### **Rectangle to rectangle**

Case	View factor	Plot
From rectangle $A_1$ at 90° to rectangle $A_2$ (mind it is singular if $x_1 = \xi_1 = 0$ ).	$F_{12} = \frac{1}{2\pi A_1} \sum_{l=1}^{2} \sum_{k=1}^{2} \sum_{j=1}^{2} \sum_{k=1}^{2} \left[ \left( -1 \right)^{(i+j+k+l)} B(x_i, y_j, \eta_k, \xi_l) \right]$ with $A_1 = (x_2 - x_1)(y_2 - y_1)$	
ξ2 ξ2 ξ1 η η η η η η η η η η η η η η η η η η	$B = (y - \eta)C \arctan(D) - \frac{C^2}{4}(1 - D^2)\ln[C^2(1 + D^2)]$ $C = \sqrt{x^2 + \xi^2},  D = \frac{(y - \eta)}{C}$	
x1 x x2 x	(e.g. for squares touching: $x_1 = \xi_1 = 10^{-6}, x_2 = \xi_2 = 1, y_1 = \eta_1 = 0, y_2 = \eta_2 = 1, F_{12} = 0.20004$ )	

### Cylindrical rod to coaxial disc at one end

(See it under 'Cylinders'.)

# Strip to strip configurations

Note. See the crossing-string method (above) for these and more general two-dimensional geometries.

### Equal parallel strips

Case	View factor	Plot
Dedictive view fectors		77

Radiative view factors

Between two identical  
parallel strips of width 
$$W$$
  
and separation  $H$ , with  
 $h=H/W$ .  
 $W \leftarrow H \rightarrow W$  (e.g. for  $h=1, F_{12}=0.414$ )  
 $(e.g. for  $h=1, F_{12}=0.414$ )$ 

# Equal adjacent strips

Case	View factor	Plot
Adjacent equal long strips at an angle $\alpha$ .	$F_{12} = 1 - \sin\frac{\alpha}{2}$ (e.g. $F_{12} _{\frac{\pi}{2}} = 1 - \frac{\sqrt{2}}{2} = 0.293$ )	$F_{12} 0,6 - 0,6 - 0,2$

# Unequal parallel strips

Case	View factor	Plot
Between two unequal	$\left( \right)^{2}$	$\begin{bmatrix} 1 \\ - \end{bmatrix} = 2W_1$
parallel strips of width	$F_{12} = \frac{\sqrt{\left(w_1 + w_2\right)^2 + 4}}{2}$	0.8
$W_1$ and $W_2$ , and	$2w_1$	$W_2 = W_1$
separation <i>H</i> , with	$\left( \right)^{2}$	$F_{12} 0.4$ $W_2 = W_1/2$
$w_1 = W_1/H$ and $w_2 = W_2/H$ .	$-\frac{\sqrt{(w_2 - w_1)} + 4}{4}$	0.2
1	$2w_1$	05 1 15 2
$W_1 \longrightarrow W_2$		
<i>H</i> →	(e.g. for $w_1 = w_2 = 1$ , $F_{12} = 0.414$ )	$w_1 = \frac{H_1}{H}$

# Unequal normal adjacent strips

Case	View factor	Plot
Adjacent long strips at 90°, the first (1) of width $W$ and the second (2) of width $H$ , with $h=H/W$ .	$F_{12} = \frac{1 + h - \sqrt{1 + h^2}}{2}$	$F_{12} 0,6$ $F_{12} 0,4$ 0,2
H W	(e.g. $F_{12}\Big _{H=W} = 1 - \frac{\sqrt{2}}{2} = 0.293$ )	$ \begin{array}{c}                                     $

# Sides of a triangular prism

Case	View factor	Plot
Between two sides, 1 and		
2, of an infinite long	I + I - I	1,0 ] Ø_=30°
triangular prism of sides	$F_{12} = \frac{L_1 + L_2 - L_3}{2L} =$	0,8
$L_1, L_2$ and $L_3$ , with	$2L_1$	$F_{12 0,4} =$
$h=L_2/L_1$ and $\phi$ the angle	$1+h-\sqrt{1+h^2-2h\cos\phi}$	
between sides 1 and 2.	= $2$	0,2 150°
$L_2$	_	0 0,5 1,0 1,5 2,0 , $L_2$
V <sup>®</sup>	(e.g. for $h=1$ and $\phi=\pi/2$ , $F_{12}=0.293$ )	$h = \frac{L}{L_1}$
$L_1$		

### NUMERICAL COMPUTATION

Several numerical methods may be applied to compute view factors, i.e. to perform the integration implied in (2) from the general expression (1). Perhaps the simpler to program is the random estimation (Monte Carlo method), where the integrand in (2) is evaluated at N random quadruples,  $(c_{i1}, c_{i2}, c_{i3}, c_{i4})$ for i=1..N, where a coordinates pair (e.g.  $c_{i1}$ ,  $c_{i2}$ ) refer to a point in one of the surfaces, and the other pair  $(c_{i3}, c_{i4})$  to a point in the other surface. The view factor  $F_{12}$  from surface  $A_1$  to surface  $A_2$  is approximated by:

$$F_{12} = \frac{A_2}{N} \sum_{i=1}^{N} \frac{\cos \beta_1 \cos \beta_2}{\pi r_{12}^2} \Big|_i$$
(11)

where the argument in the sum is evaluated at each ray i of coordinates  $(c_{i1}, c_{i2}, c_{i3}, c_{i4})$ .

- Example 4. Compute the view factor from vertical rectangle of height H=0.1 m and depth L=0.8 m, towards an adjacent horizontal rectangle of W=0.4 m width and the same depth. Use the Monte Carlo method, and compare with the analytical result.
- Sol. The analytical result is obtained from the compilation above for the case of 'With plates and discs / Perpendicular configurations / Rectangular plate to unequal rectangular plate', obtaining, for h=H/L=0.1/0.8=0.125 and w=W/L=0.4/0.8=0.5 the analytical value  $F_{12}=0.4014$  (mind that we want the view factor from the vertical to the horizontal plate, and what is compiled is the opposite, so that a reciprocity relation is to be applied).

For the numerical computation, we start by setting the argument of the sum in (11) explicitly in terms of the coordinates  $(c_{i1}, c_{i2}, c_{i3}, c_{i4})$  to be used; in our case, Cartesian coordinates  $(x_i, y_i, z_i)$ y'i) such that  $(x_i, y_i)$  define a point in surface 1, and  $(z_i, y'_i)$  a point in surface 2. With that choice,  $\cos\beta_1 = z/r_{12}$ ,  $\cos\beta_2 = x/r_{12}$ , and  $r_{12} = \sqrt{x^2 + z^2 + (y_2 - y_1)^2}$ , so that:

$$F_{12} = \frac{A_2}{N} \sum_{i=1}^{N} \frac{\cos \beta_1 \cos \beta_2}{\pi r_{12}^2} \bigg|_i = \frac{WL}{N} \sum_{i=1}^{N} \frac{zx}{\pi r_{12}^4} \bigg|_i = \frac{WL}{N} \sum_{i=1}^{N} \frac{zx}{\pi \left[x^2 + z^2 + (y - y')^2\right]} \bigg|_i = \frac{WL}{N} \sum_{i=1}^{N} f_i$$

where  $f_i$  is the value of the function at a random quadruple  $(x_i, y_i, z_i, y'_i)$ . A Matlab coding may be:

W=0.4; L=0.8; H=0.1; N=1024;  $f = @(z,y1,x,y2) (1/pi)*x.*z./(x.^2+z.^2+(y2-y1).^2).^2;$ %Defines the function for i=1:N fi(i)=f(rand\*H, rand\*L, rand\*W, rand\*L);end; %Computes its values F12=(W\*L/N)\*sum(fi)

%Data, and number of rays to be used %View factor estimation

Running this code three times (it takes about 0.01 s in a PC, for N=1024), one may obtain for  $F_{12}$  the three values 0.36, 0.42, and 0.70, but increasing N increases accuracy, as shown in Fig. E4.

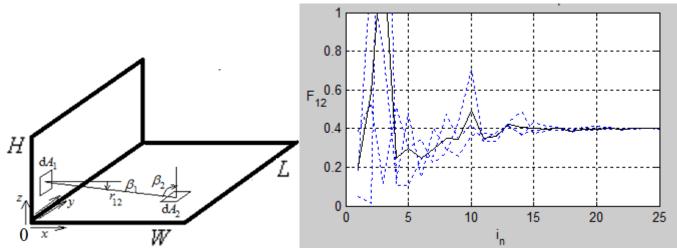


Fig. E4 Geometry for this example (with notation used), and results of the  $F_{12}$ -computation with a number  $N=2^{in}$  of random quadruplets (e.g.  $N=2^{10}=1024$  for  $i_n=10$ ); three runs are plotted, with the mean in black.

# REFERENCES

Howell, J.R., "A catalog of radiation configuration factors", McGraw-Hill, 1982. (web.) Siegel, R., Howell, J.R., Thermal Radiation Heat Transfer, Taylor & Francis, 2002.

Back to Spacecraft Thermal Control